




Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

06.05.2004

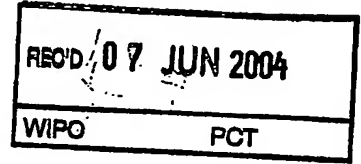

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03010217.2

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03010217.2
Demande no:

Anmeldetag:
Date of filing: 06.05.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

NESTEC S.A.
Avenue Nestlé 55
CH-1800 Vevey
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Visually attractive, freshly prepared extruded fat-based confectionery product
with temporary flexibility having enhanced melt-in-the-mouth properties and
method of dispensing the same

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

A23G/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Visually attractive, freshly prepared extruded fat-based confectionery product with temporary flexibility having enhanced melt-in-the-mouth properties and method of dispensing the same.

5 The present invention relates to a novel and visually attractive fat-based confectionery product with enhanced melt-in-the-mouth properties as compared to traditional confectionery products and which can be conveniently and rapidly prepared in front of consumers on demand. The invention also relates to a method for dispensing such a product in a very convenient, versatile and rapid way. The invention finds a particular application in foodservice locations such as restaurants, 10 fast foods outlets, canteens and convenient stores where there is an increasing demand for innovative food.

To date, the range of fat based confectionery such as chocolate and chocolate-like products (later called "chocolate" for simplification) offered in foodservice locations remains very traditional. The vast majority of fat-based confectionery 15 products are produced in chocolate manufacturing plants, packaged and offered for sale on shelves at the foodservice outlet. Therefore, whereas they are successful in stores where consumers buy them to eat them later or on-the-go, they are less successful in restaurants or commercial locations where food, ice creams or beverages are offered in different varieties such as in menus or on demand.

20 In some foodservice outlets, fat-based confectionery is sometimes used as a liquid topping or decoration for covering or accompanying some particular foods such as sundaes, cakes or waffles. The fat-based confectionery is usually a liquid sugar and chocolate-based mixture served from containers by a foodservice operator and which gives a sensation of liquid chocolate either hot or cold. However, the taste is 25 usually far from the incomparable taste of solid chocolate and its attractiveness is rather limited as such.

In other occasions, solid chocolate can be served to accompany food or beverage items. For example, coffee beverages may traditionally be served together with a small amount of solid dark or milk chocolate such as chocolate buttons or 30 wrapped mini-slabs. Coffee usually marries well and enhances the taste of chocolate which makes this combination traditionally successful. However, this combination is rather marginal and this is not utilizing all the potential attractiveness of chocolate within a wider offer, either as such or in combination with other foods and beverages.

35 There is also a growing trend for consumers to enjoy watching food being prepared freshly for them, examples are visible espresso machines in cafés, in-store

bakeries and flamboyant pizza dough preparation and baking. Watching the food or beverage being prepared adds to the consumer's enjoyment, and the consumers' perception of its value increases because they know it is fresh and specially prepared for them. Although consumers can watch confectioners forming and decorating chocolate confectionery, they cannot eat or buy the result immediately as the chocolate has to be cooled under controlled conditions to solidify it before it can actually be handled. Typically, there is at least a twenty-minute delay before a freshly created chocolate confectionery item can be handled and eaten by the consumer, by which time most consumers will have lost interest or will have purchased items previously prepared.

Liquid or solid chocolate that is usually proposed for combination with food products is not freshly formed which may be detrimental, especially, when it is combined with freshly dispensed products such as warm waffles, croissants or ice creams.

Many consumers, whether children or adults, enjoy being able to play with their meal or drink accompaniments. For example, chocolates served with coffee are often presented in a foil wrapper, and many people gain additional relaxation and pleasure from being able to twist the foil wrapper into a variety of shapes. Children are also well known to enjoy having items to play with accompanying their food. Fast food outlets often supply meals which include a toy for this purpose. To date, there are very few chocolate meal or drink accompaniments which have this "play value". Chocolates in animal or character shapes may provide entertainment for a while, but there is no opportunity to bend and shape the chocolate as it is not flexible and so the consumer's interaction with the product is limited.

Fats are known which allow a chocolate-like material to be made flexible. EP 0502697 describes a flexible chocolate composition having improved flexing characteristics and moldability. However, this composition uses a fat rich in di-saturated mono-oleate triglycerides which cannot be legally described as chocolate in most countries. In addition, because a special composition is required to achieve the flexible effect, consumers cannot experience their favorite chocolate and chocolate-like products in a flexible state.

Food products in the form of long flexible strands such as tagliatelle, spaghetti, linguine or noodles are visually attractive and part of the pleasure of eating them derives from the ability to twist them and gather them up before putting them in the mouth. Processes for producing chocolate strands are known. EP0321449

describes a process for producing chocolate filaments from supercooled liquid chocolate to form a self-supporting, frangible, open lattice structure of discrete filaments. However, once set, the product is rigid and breaks easily in many small pieces if manipulated.

- 5 Chocolate vermicelli are also well known as short strands of chocolate used to decorate cakes and ice-cream, and these are produced by pushing tempered liquid chocolate through a sieve to form thin strands. Chocolate vermicelli for food service applications is produced in bulk by the manufacturers, packaged and sent to the food service outlet for addition to food products.
- 10 For both chocolate vermicelli and chocolate strands produced according to EP0321449 the chocolate cannot be handled until after it has been cooled for many minutes to solidify it. Once cooled, the chocolate produced in these conventional ways is not flexible so it is never in a state where it can both be physically handled and is flexible.
- 15 An important food service outlet for chocolate is for chocolate which is then combined with ice cream. Consumers often have favourite chocolate products with distinctive tastes which they would like to eat together with ice cream. The melting speed and viscosity of chocolate affects its perceived flavour as is described in S.T. Beckett, The Science of Chocolate, Chapter 5, RSC 2000. When popular chocolates
- 20 are eaten together with ice cream, the low temperature reduces their melting speed and so changes their flavour. Often the chocolate is so hard when combined with ice cream that it shatters into pieces in the mouth which are swallowed before they have had a chance to melt in the mouth and release any flavour. Chocolates can be reformulated with higher fat contents and lower melting point fats to increase their
- 25 melting rate and so improve their flavour with ice cream. However, if these products are then picked out of the ice-cream and allowed to warm up, the consumer is disappointed that they do not have the taste and texture of their favourite product, and often are so soft that they are difficult to handle and are likely to make a mess of children's clothing. In addition, some consumers have favourite chocolate products
- 30 which they do not wish to contain fats other than cocoa butter.

A rapid melting chocolate provides an enjoyable sensation in the mouth. The melting sensation itself is pleasurable, but then the mouth is rapidly cleared of chocolate giving a clean eating sensation. A rapid melting chocolate is especially advantageous when the chocolate is combined with a freshly served food or

beverage in order to compensate for the relatively dry taste or purely liquid taste of the accompanied item.

Chocolate in a liquid form does not melt in the mouth, and so the eating satisfaction is much reduced. It also has the disadvantage that it can easily drip off the food. For instance, when served on top of ice cream, liquid does not stay long in place and can more easily smear on hands of the consumer. Liquid chocolate also does not serve well with beverages such as coffee for instance. Furthermore, it can not be shaped into attractive forms and does not add much to the attractive appearance of the food it is on except that people can immediately recognize its presence or not on the food. Liquid chocolate cannot be picked up and handled and if touched causes very sticky fingers.

Therefore, there is a need for a novel fat based confectionery product that can be delivered rapidly and conveniently and which offers the advantages of enhanced ability to melt-in-the-mouth compared to traditional solid fat based confectionery product but, at the same time, can be shaped in various different attractive forms and can be manipulated without significantly sticking to the hands in order to offer a certain play value.

There is also a need for a melt-in-the-mouth effect that lasts more than a few seconds after the product has been produced since delivery times to the consumer at the foodservice location may be very variable depending on various factors like traffic, peak hours, drive-in orders, etc.

There is also a need for a product that has a sufficiently rapid melt in the mouth to provide a good flavour when combined with, and at the temperature of, ice cream.

There is also a need for a product that gives the appearance and sensation of a freshly formed product.

There is also a need for a product that does not drip off the food when combined to it.

There is also a need for a product that provides a light feeling in the mouth having the property of being able to fill a large empty volume with a minimum mass of material.

There is also a need for a novel fat based confectionery product which the consumer can handle before eating.

There is also a need for a product that can use any typical chocolate compositions which are appreciated by consumers and can be labeled "chocolate".

There is a need for a product that provides the sensation of an important volume of product as compared to its actual mass to provide attractive and decorative attributes.

5 There is a need for a product that is adapted for being consumed alone or combined to various types of food and beverages to make, for example, a topping or a decoration.

The present invention satisfies these needs.

For that, the present invention relates to a fat based confectionery product formed of at least one elongated strand of extrudate of fat based confectionery material characterized in that:

10 the at least one strand of extrudate is capable of being physically handled while exhibiting a temporary flexibility and,

in that the strand of extrudate has further been formed to a surface area-to-mass ratio that is higher than 8.0 cm^2 per gram unit with the at least one strand having a continuous total length that is higher than 30 mm.

We found surprisingly that the combination of the shape in the elongated strand configuration, the flexibility of the extrudate and the increased surface area-to-mass ratio obtained by extrusion, all together provided a remarkable temporary, more rapid melt-in-the-mouth ability. This ability is also combined to other advantages which are the remarkable external volume occupied by such a resulting product when flaked into a receptacle or onto a surface which far exceeds the usual volume of a typical moulded article and, therefore, its ability to provide a light feeling and also to decorate in many different ways any sorts of food item associated therewith, for example, a waffle, a cake, a pancake, other pastries, or an ice cream, etc. Also the extrudate can be manipulated by the consumer and is in the form of visually attractive long strands. The faster melt-in-the-mouth property is a particular advantage when the chocolate product is combined with ice cream as it improves flavour delivery at the temperature of ice-cream.

25 More preferably, the at least one strand of the extrudate has a surface area-to-mass ratio that is higher than 10.0 cm^2 per gram unit and a continuous length that is higher than 80 mm. Most preferably, the surface area-to-mass ratio is comprised between about 11.0 cm^2 and 30 cm^2 per gram unit. More preferably, the at least one strand has a length greater than 100 mm and, even possibly greater than 500 mm. Most preferably, the length of the at least one strand is of from 100 to 1000 mm. The

surface-area-to-mass ratio represents the total area at the external surface of the strand for one gram of product.

Within these ranges of lengths and surface area-to-mass ratios and because also the fat based material has a certain flexibility when it is delivered, the at least one strand forms into a curled configuration with the strand forming a continuous piece of a plurality of curls. The advantage is that even a little mass of product has the ability to occupy a relatively large volume. Therefore, the product provides a visual effect of material mass but stays light. The product can, for instance, be flaked onto a food surface or in a container and be ready for consumption as such.

5

10 Preferably, the at least one strand is layered freely on a support surface without forming a predetermined outer shape. The support surface may be a food surface such as ice cream, pastry and the like or a non-edible surface such as a cup or glass lid.

Therefore, the combination of the curled configuration of strand(s), the high surface-to-mass ratio and high ability to flex, provides a product with a large volume occupancy when lying onto a food surface or within a container.

15

The volume occupancy is reflected by the volume naturally occupied by the product per mass unit. In particular, the volume occupancy of the product onto a food surface or in a container is higher than $2.5 \text{ cm}^3/\text{g}$, more preferably higher than $3.0 \text{ cm}^3/\text{g}$, most preferably between $3.5 \text{ cm}^3/\text{g}$ to $10 \text{ cm}^3/\text{g}$. The volume occupancy of the product is determined by measuring the volume naturally occupied by the product after it is flaked onto the food surface or within a container. For instance, a mass of less than 30 grams of fat based material as readily obtained in one or more strands can occupy a natural volume of more than 100 cm^3 . Apart from the enhancement of the visual impact, the high volume to mass ratio also provides a light feeling in the mouth comparable to aerated confectionery products. The light feeling is related to how easily the teeth cut through the product as the jaws close, and how easily they are released as the jaws open. As a matter of comparison, a solid chocolate has a volume occupancy typically of about $0.8 \text{ cm}^3/\text{g}$ and requires more effort to bite through and so has a heavier eat. In contrast a bundle of chocolate strands in the mouth has substantial air space and so requires little effort for the bite and opening the jaws and so gives more pleasurable light eat, particularly when combined with the rapid melt.

20

25

30

The extrudate is preferably formed by freshly extruding of a solid mass of fat confectionery material which is pressed under pressure through a die and at a temperature of the mass less than 30°C , later referred as "cold extrusion", and by serving the freshly extruded strand or strands before the temporary flexibility ceases

35

thereby providing an enhanced melt-in-the-mouth effect. Freshly extruding of the fat based confectionery material combined to a higher surface area-to-mass ratio causes it to melt more rapidly in the mouth than the same material served later or compared to a material of lower surface area-to-mass ratio.

5 "Cold extrusion" refers to the process described in EP 0603 467 B1, the entirety of which is hereby incorporated by reference. EP 0603 467 B1 discloses a process for plastically extruding a fat-containing confectionery material which comprises feeding the fat-containing confectionery material into an extruder and applying a pressure to the fat-containing confectionery material in a substantially solid or semi-
10 solid non-pourable form upstream of a flow constriction at a temperature at which the fat-confectionery material is extruded substantially isothermally and remains in a substantially solid or semi-solid non-pourable form to produce an axially homogeneously extruded product having a cross section that is of substantially the same profile as the die of the extruder, which is capable of retaining its shape and
15 which has a temporary flexibility or plasticity enabling it to be physically manipulated or plastically deformed before losing its flexibility or plasticity.

The present invention takes advantage of this process to produce a freshly produced temporary ductile product with a higher surface area-to-mass ratio that provides the sensation to melt more rapidly in the mouth.

20 As a definition, the attribute of "flexibility" refers to a 15cm section of extrudate strand that can be brought from a substantially straight position to a position where the two ends have been bent round to touch each other without the material developing a visible crack, substantially altering its cross-section or breaking apart.

The temporary flexibility of the strand of extrudate should last at least during 3
25 minutes after extrusion in order to provide the beneficial melting sensations. The flexibility is also dependent on the cross sectional shapes and the surface area-to-mass ratio; for instance, more compact shapes and lower surface area-to-mass ratio exhibiting comparatively lower flexibility properties.

The temporary flexibility of the at least one strand of extrudate is of at least 2
30 minutes, preferably of at least 3 minutes and most preferably between about 4 minutes and about 4 hours.

The fat based confectionery material is preferably dark, milk or white chocolate, compound or couverture. The fat based confectionery material may also include products derived from sugar with or without milk derived components, and fat and
35 solids from vegetable or cocoa sources in differing proportions having a moisture content less than 10%, more usually less than 6% by weight. The fat-based confectionery material may include chocolate substitutes containing direct cocoa

butter replacements, stearines, coconut oil, palm oil, butter or any mixture thereof; nut pastes such as peanut butter and fat; praline; confectionery's coatings also known as compounds or couvertures, used for covering ice cream or cakes usually comprising chocolate or analogues with cocoa butter replaced by a cheaper non-tempering fat; or "Caramac" sold by Nestlé comprising non-cocoa butter fats, sugar and milk. Traditional chocolate normally contains from 30 to 35 wt. % fat and in this invention, fat based confectionery material may, if desired, contain normal amounts of fat or less than the normal amount of fat present in chocolate, e.g., it may contain from 16 to 35 wt. % total fat and preferably 20 to 30 wt. % total fat. Fats can be chosen among traditional chocolate fats such as cocoa butter and/or vegetable fats to provide product compositions with amounts of low melting tri-glycerides and ratios of triglycerides which are typical for chocolate or chocolate-like substances. In particular, the fat composition of the fat based material is determined such that flexibility is primarily obtained by the process of "cold" extrusion and does not necessarily require specific triglyceride compositions which require unusually high proportions of low melting point triglycerides. In particular, the triglyceride composition of the fat based material used for the product can contain di-saturated mono-unsaturated glycerides, where less than 20 wt.% of the di-saturated mono-unsaturated glycerides are di-saturated mono-linoleate.

Provided the ratio surface area-to-mass ratio is respected, the cross sectional shape of the extruded strand may be a circle, a star, a triangle, a rectangle, a polygon or a non symmetrical shape. Flat surfaces of these shapes can also be slightly curved as convex or concave lines to form, for instance, rounded rectangle or polygon, without departing from the scope of the invention.

Therefore, preferred extruded shapes are circular shapes to form rods of relatively small diameters, preferably of less than 3.5 mm. Other preferred shapes are flat shapes such as ribbons of height less than 1.2 mm preferably less than 1.0 mm and width of more than 5.0 mm preferably more than 6.0 mm. Ribbons of such dimensions exhibit large surfaces for contacting with the tongue and thus melt more rapidly for providing a more pleasurable sensation in the mouth.

The fat based confectionery product of the invention may also comprise several strands of extrudate obtained by parallel extrusion and forming an extruded product of intermeshed and curled configuration of strands.

The fat based confectionery material may contain different coloured dyes in order to enhance the decorative effect. By virtue of the elongation provided on the material when passing through the die of the extruder, different degrees of colouring can be achieved such as veined or marble effects. Varying effect can be obtained by

varying the dye concentration in the material and/or as by varying the operational conditions of extrusion.

The invention also relates to a food product made of the association with the fat base confectionery product as aforementioned and at least one other edible item.
5 The edible support is ice cream, pastry, solid confectionery product, a beverage or combinations thereof. For instance, pastry may be waffles, shaped sugar wafers, cakes, croissants, pancakes, pies, etc. For instance, solid confectionery can be set chocolate or sugar supports. For instance, the beverage can be coffee, tea, chocolate, cappuccino, latte, etc. The edible item may serve itself as a support for
10 receiving the fat based confectionery product. The support may also be made by a non-edible container. The non-edible container may be a plastic glass or cup.

In one preferred embodiment, the food product comprises a plastic container into which is received at least one strand, preferably many strands, of the fat based confectionery product. The strands of confectionery product may provide the
15 appearance of pasta products such as spaghetti, taggliatelle, linguine, noodles or worms.

The invention also relates to the method for conveniently delivering a decorating, easy-to-handle confectionery product of enhanced melt-in-the mouth properties, at a foodservice outlet, characterized in that it comprises
20 forming of at least one ductile elongated strand of extrudate of fat based confectionery material which is capable of retaining its extruded cross-sectional shape and has at least a temporary flexibility; by extruding a mass of fat based confectionery material and,
depositing the at least one strand of extrudate with the at least one strand
25 having a continuous total length that is higher than 30 mm; wherein the strand is extruded through a die to form at least one strand of surface area-to-mass ratio that is higher than 8.0 cm² per gram unit.

In the forming step, it comprises:
providing a solid fat based confectionery mass,
30 submitting the solid fat based confectionery mass to a pressure in an extruder at a temperature of less than 30°C,
passing the solid fat based confectionery mass through a die of predetermined cross section to make at least one strand of product,
optionally, cutting the strand at the desired total length and,
35 receiving the at least one strand in a serving container or onto a food item.

Preferably, the at least one strand, as extruded is served immediately after it is received in the container or onto the food item to retain its flexibility properties and

consequently also its melting properties. By "immediately", it is meant that the serving is preferably carried out within half an hour, preferably a quarter of an hour or even less.

5 In order to obtain strands of thin rod shapes which exhibit enhanced melting features, the die comprises an outlet of circular cross section of less than 3.5 mm, preferably of between 3.0 and 0.5 mm.

10 In order to obtain ribbons of suitable shapes and dimensions providing the enhanced melting features, the die comprises an outlet of slot shape of height less than 1.2 mm preferably less than 1.0 mm and width of more than 5.0 mm preferably more than 6.0 mm.

15 The invention further relates to the apparatus for the on demand dispensing of the confectionery product as aforementioned. The apparatus comprises barrel means for receiving a predetermined amount of fat based confectionery material, a pressure engaging means for engaging under pressure the fat based confectionery material contained in the barrel means, and it further comprises die means arranged for producing at least one elongated strand of the fat based confectionery product of a surface-area-to-mass ratio that is higher than 8.0 cm² per gram unit, and control means for actuating the pressure engaging means with the barrel means upon the push of a button and for extruding the at least one strand of the fat based
20 confectionery.

Figures 1 to 3 illustrate the method for extruding and dispensing fat based confectionery product of the invention using an exemplary dispensing apparatus;

Figure 4 is a photograph of a first embodiment of the confectionery product as extruded by the method of Figures 1 to 3 which shows a ribbon;

25 Figure 5 is a photograph of a food product of the invention which shows a ribbon as extruded and deposited in a cup made of sugar wafer;

Figure 6 is a photograph of another embodiment of the confectionery product of the invention.

30 Referring to Fig. 1 to 3, the schematic shows the basic design of the on-demand dispensing device 1 which comprises an extruder 10, a control device 11 and a serving arrangement 12. A housing may enclose the mechanisms of the system and may be used for branding and to convey to the customer the nature of the product to be sold. The control device comprises a switch board 13 with buttons or other controls for activating the extruder 10 and selecting specific products and or
35 dispensing activities.

The extruder 10 comprises a pressure engaging system 14 mounted on a frame 15 of the device. The pressure engaging system 14 comprises preferably an

electrically or hydraulically driven ram comprising a reciprocating plunger 16 intended to engage a barrel 28 of the device. An alternative pressure engaging system could be used and the ram could be replaced by a motor driven volumetric displacement screw which cooperates with the barrel.

5 The barrel extends at the exit end by a die 17 shaped with at least one outlet 18 to shape the desired product cross section, in particular, to achieve the high surface area-to-mass ratio necessary for the intended benefits of the invention. The die is removably connected to the barrel and is interchangeable with other dies of different outlet configuration so as to achieve a wide range of product shapes and cross
10 sections. Rapid quick disconnecting means can be so attached to the die for a more rapid mounting. Several dies can also be positioned in a carousel and be selected by the control means to change automatically the product configuration that is dispensed. The die may comprise one or more outlets. The outlets may encompass a wide range of cross sectional shapes such as circular, rectangular, rounded
15 rectangular, polygonal or any other shapes. In one preferred configuration, the die has one outlet of a diameter of less than 3.5 mm to produce a single thin rod of extrudate. In another configuration, the die has multiple outlets to extrude a plurality of thin rods at a time, the diameter of each being less than 2.0 mm, and the outlets being separated from at least 1 mm from each other to extrude discrete pasta-like or
20 worm-like strands of extrudate. In yet another configuration, the die has the shape of a slot with a height lower than 1.0 mm and a width higher than 5.0 mm to produce a ribbon of extrudate similar to "tagliatelle" pasta.

In a preferred configuration, the barrel is also made displaceable between a loading position (Figure 1) and an extruding position (Figures 2 and 3) by means of a
25 sliding arrangement including, for examples, guiding means 19 in the frame engaging with the barrel 28. The barrel can be moved in the two positions by means of a mechanical actuating system such as a pusher 20 or any other equivalent system. The barrel can be spring loaded to the frame so that when the pusher is pulled off, the barrel can automatically return in the loading position. Of course, the motion of
30 the barrel could also be carried out by electrical means and electronic control using, for instance, a solenoid to move the barrel which is controlled by the controller 21 of the control device 11. The barrel could also be manually operated.

When in the loading area, the barrel can be charged with solid fat based confectionery material such as chocolate buttons, flakes or morsels 30. For example,
35 the material is fed through a hopper 22 mounted to the frame above the barrel. Charging of the material in the hopper may be achieved by any means such as manually or automatically. Large solid pieces of chocolate such as bars or big chunks

can also be provided as the starting material. For example, solid chocolate in the form of a solid one piece refill of chocolate can be provided which has a predetermined specific shape and size that fits the inside of the barrel. The barrel may, for instance, have a specific cross section such a polygonal (pentagonal, hexagonal, etc.) shape which complements the shape of the refill so as to guarantee only complementary shaped refills are receivable.

Optionally the barrel could be charged with a liquid fat based confectionery material which was then cooled within the barrel to solidify it.

The final products delivered to the consumer may also be customized by selecting variables such as the type of chocolates among a choice of different types of chocolates, the die configuration, e.g., number of outlets, shapes and cross-section, and also eventually, the extruding operational conditions, e.g., extruding time, speed, etc.

After the right material and correct amount of material has been charged, which may correspond to one or more servings of extruded product, the pusher is activated to place the filled barrel in the extruding position beneath the ram 14. In operation, the ram is then advanced at a pressure of between 5 to 200 bars, preferably 20 to 100 bars and at a temperature of the mass below 30 °C, preferably of between 10 to 25°C. It is important that the product extruded through the die be kept in a semi-solid non-pourable state to form strands that can retain their shape. If the product melts completely in the extruder to form a liquid, subsequent cooling at the die outlet will not provide a flexible material which can be handled.

The barrel may additionally be maintained chilled to improve shape retainability or control the desired degree of flexibility. In particular, chilling of the barrel below ambient may be required to compensate the heat transfer from the mechanical forces, for example, by a refrigeration system that transports a cooling agent through the barrel's walls.

The pressure engaging system 14 is controlled by a controller 21 such as a PLC control which can turn on and off a motor 23 to reciprocate the ram toward the barrel 28 as a response to the activation of a button at the board 13. As shown in Figure 3, the product comes out of the die under the form of at least one strand of chocolate which is received in the serving area 12. In a preferred embodiment, the strand is received on a sliding ramp 27 that directs it to the serving area to maintain the integrity of the strand. Its curled configuration and to avoid to damage the strand. The properties of flexibility of the product combined with the ramp enables the apparatus to deliver long curled strands of product, e.g., from several centimetres to metres, without breakage or cracks occurring in the product.

Figure 4 illustrates one example of food product which can be obtained by the method of the invention. The food product is combination of an ice cream and an extruded ribbon of coloured chocolate. The food product is received in a glass cup for serving.

5 Figure 5 illustrates another example with a coloured chocolate ribbon in a sugar wafer cup.

Figure 6 is another example with coloured spaghetti-like strands in glass cup.

Examples:

10

Example 1 – Milk chocolate rod of extrudate

Milk chocolate buttons with a fat content of 28.7% by weight and a milk fat content of 6.1% by weight were introduced in a barrel of the extruder as
15 aforementioned and extruded at ambient temperature through a circular die aperture with a diameter of 3 mm to produce a rod-shape. This had a surface area of 10.7 cm²/g. A curled strand of 50 cm long is obtained without breakage. It was possible to obtain a few strands of 300 cm long without breakage.

20

Example 2 – Milk chocolate ribbon of extrudate

The same milk chocolate used in example 1 was extruded through a slot shaped die, 0.75mm high and 6.75mm wide to produce a ribbon shape. This had a surface area of 23.8 cm²/g. A curled strand of 100 cm long is obtained without
25 breakage. It was also possible to obtain a few strands of 500 cm long without breakage.

Example 3 – Flexibility tests

30 A 15-cm length of the extruded material was cut. The material is considered flexible if the two ends of the material can be brought from a position 15 cm apart to a position where they touch each other without the material developing a visible crack, substantially altering its cross-section or breaking apart. A fresh piece of material was used for each test.

35 A rod-shape was extruded as in example 1. The temperature in the room was 22.± 0.5.°C. A series of 15cm lengths were tested for flexibility with a minimum

interval of 30s. The last time after extrusion at which a sample was flexible was recorded. The experiment was repeated three times.

Longest time where a flexible sample of 3mm diameter rod was found;

Trial 1: 3 minutes 30s

5 Trial 2: 3 minutes

Trial 3: 4 minutes

The experiment was repeated with a ribbon shape as in example 2.

Samples of this 0.75mm thick ribbon were still flexible after 4 hours, but broke when next tested at 19 hours after extrusion.

10

Example 4 – Sensory tests

Sensory profiling was used to compare the melting time of a milk chocolate prepared in three different ways.

15

Sample 1. Freshly extruded example 1 (3mm rod), tasted by the sensory panel within 10 minutes of extrusion.

20

Sample 2. Previously extruded example 1 (3mm rod), extruded 5 days before the sensory session.

Sample 3. Freshly extruded example 2 (0.75mm ribbon), tasted by the sensory panel within 10 minutes of extrusion.

25

Six panelists, already trained in the evaluation of chocolate products, were given specific training on extruded chocolate products for a total training period of 2 hours. The purpose of the training was to introduce the three products to the panelists and to reach an agreement on the protocol of tasting. The three products were then evaluated by the 6 trained panelists.

30

The products were tested in a monadic sequence (one product assessed before evaluating the next product) and assessed in three replicates. A complete randomised and balanced design was used to avoid any bias due to the presentation order. All samples were coded with 3-digit random numbers and assessed blind. Each portion of sample to be tasted was weighed (1.8 +/- 0.1g) and placed on a small plastic weighing boat so that it could be tipped into the mouth in one movement. The panelists placed the chocolate between their tongue and the roof of

35

their mouth and recorded when the chocolate had completely disappeared. Data were collected using Fizz software (Biosystemes, Version 2.00E).

The mean scores of the products (over the panel and the three replications) for the attribute melting time are indicated in Table 1.

5

	Sample 1 (Freshly extruded 3mm rod)	Sample 2 (Previously extruded 3mm rod)	Sample 3 (Freshly extruded 0.75 mm ribbon)
1 st replicate	35.8	41.0	30.8
2 nd replicate	33.2	34.7	29.2
3 rd replicate	37.3	38.3	31.3
Average	35.4	38.0	30.4

Table 1: Means of the melting time of the three products (in seconds)

10 A two-factor analysis of variance was conducted for the attribute melting time. The attribute melting time discriminated the three samples (with a minimum confidence level of 95%). A least significant difference test was also run. The three products were significantly different (at a minimum confidence level of 85%).

15 The freshly extruded 3mm rod (sample 1) melted faster than the previously extruded 3mm rod (sample 2). The thin ribbon (sample 3) was the quickest to melt.

Examples 5 – Volume occupancy

20 Ribbon as example 2 was allowed to flake naturally into cup with a 55-mm diameter circular opening, 45-mm circular base and height of 55 mm. The internal volume of the cup was 110 cm³. The cup was filled by 17g of ribbon. The occupancy of the ribbon lying in the cup was therefore 6,5 cm³/g.

25 The same chocolate was extruded through a die with three holes, each with a diameter of 1.5mm, their centres positioned equidistant on the circumference of an imaginary circle of radius 2.5mm.. The cup was filled by 30g of this "spaghetti-like material" (surface area 21.4 cm²/g). The occupancy of the material lying in the cup was therefore 3.7 cm³/g.

As a matter of comparison, the chocolate buttons serving as the starting material placed in the same cup had an occupancy of 1.5 cm³/g.

5 Example 6 - Solid content

Milk chocolate with a fat content of 32 wt.% and a milk fat content of 4.5 wt.% was extruded through a circular die aperture with a diameter of 3 mm to produce a rod-shape. Before extrusion, the chocolate temperature was 20.0°C and the total solid content of the chocolate measured by a Bruker Minispec pc120 was 84.5 wt.%. Immediately following extrusion the chocolate temperature was 21.3°C and within 1 minute of extrusion the solid content of the chocolate was measured as 74.8 wt.%. The Bruker Minispec pc120 was calibrated prior to use with 3 reference standards. Chocolate samples were simply placed in an NMR glass tube, introduced into the Minispec pc120 and measured with no conditioning step.

15 Example 7 - Triglyceride composition in chocolate

Chocolate of example 1 was analysed by HPLC to determine its triglyceride composition.

20 For the chocolate used in examples 1: Triglyceride composition determined by HPLC. The triglycerides individually determined were OLL, PLL, OLO, StLL, PLO, PoOP, PLP, OOO, StLO, POO, PLSt, POP, StOO, StLSt, POST, PPSt, StOSt, PStSt and StOA where P = Palmitic acid, Po = Palmitoleic acid, St = Stearic acid, O = Oleic acid, L = Linoleic acid, A = Arachidic acid. There was also 6.5 wt.% of other small triglycerides with an equivalent carbon number less than 46. Scaling the individually determined triglycerides to 100 wt.% 91.8 wt.% of these triglycerides were di-saturated mono-unsaturated glycerides (S2U), 6.8 wt.% were di-unsaturated mono-saturated glycerides (SU2), 0.6 wt.% were tri-unsaturated glycerides (U3) and 0.8 wt.% were tri-saturated glycerides (S3). There were 5.3% di-saturated mono-linoleates (S2L) which is 6 wt.% of the total di-saturated mono-unsaturated glycerides.

35 While illustrative embodiments of the invention are disclosed herein, it will be appreciated that numerous modifications and other embodiments may be devised by those skilled in the art. Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments that come within the spirit and scope of the present invention.

Claims:

5

1. A fat based confectionery product formed of at least one elongated strand of extrudate of fat based confectionery material characterized in that:

the at least one strand of extrudate is capable of being physically handled while exhibiting a temporary flexibility and,

10

in that the strand of extrudate has further been formed to a surface area-to-mass ratio that is higher than 8.0 cm^2 per gram unit with the at least one strand having a continuous total length that is higher than 30 mm.

15

2. The fat based confectionery product of claim 1, wherein the at least one strand of the extrudate has a surface area-to-mass ratio that is higher than 10.0 cm^2 per gram unit and a continuous length that is higher than 80 mm.

20

3. The fat based confectionery product of claim 1, wherein the extrudate is formed by extruding of a solid mass of a fat confectionery material which is pressed under pressure through a die and at a temperature of less than 30°C .

25

4. The fat based confectionery product of any one of the preceding claims, wherein the at least one strand has a curled configuration forming a continuous strand of a plurality of curls.

30

5. The fat based confectionery product of any one of the preceding claims, wherein it has a volume occupancy of more than $2.5 \text{ cm}^3/\text{g}$.

6. The fat based confectionery product of any one of the preceding claims, wherein the strand of extrudate retains its temporary flexibility at least during 3 minutes after extrusion.

35

7. The fat based confectionery product of any one of the preceding claims, wherein the at least one strand is layered freely on a support surface without forming a predetermined outer shape.

8. The fat based confectionery product of any one of the preceding claims, wherein the fat-based confectionery material is dark, milk or white chocolate, compound or couverture.

5 9. The fat based confectionery product of any one of the preceding claims, wherein the cross-sectional shape of the extrudate is a circle, a star, a triangle, a rectangle, a rounded rectangle, a polygon or a non-symmetrical shape.

10 10. The fat based confectionery product of any one of the preceding claims, wherein the at least one strand has a length greater than 100 mm.

11. The fat based confectionery product of any one of the preceding claims, wherein the at least one strand has a length greater than 500 mm.

15 12. The fat based confectionery product of any one of the preceding claims, wherein it comprises several strands of extrudate obtained by parallel extrusion and forming an extruded product of intermeshed and curled configuration of strands.

20 13. A food product made of the association of a fat base confectionery product according to any of claims 1 to 12 and at least one other edible item for receiving the fat based confectionery.

25 14. A food product according to claim 13 wherein the edible item is ice cream, pastry, solid confectionery product or combinations thereof.

16. A food product according to claim 13 or 14, wherein the edible item serves as a support for receiving the fat based confectionery product.

30 17. Method for conveniently delivering a decorating, easy-to-handle confectionery product of enhanced melt-in-the mouth properties, at a foodservice outlet, characterized in that it comprises forming of at least one ductile elongated strand of extrudate of fat based confectionery material which is capable of retaining its extruded cross-sectional shape and has at least a temporary flexibility; by extruding a mass of fat based confectionery material and depositing the at least
35 one strand of extrudate in a curled configuration with the at least one strand having a continuous total length of multiple curls that is higher than 30 mm; wherein the strand

is extruded through a die to form at least one strand of surface area-to-mass ratio that is higher than 8,0 cm² per gram unit.

5 18. Method according to any one of claim 17, wherein forming the at least one elongated strand of extrudate comprises
providing a solid fat based confectionery mass,
submitting the solid fat based confectionery mass to a pressure in an extruder at a temperature of less than 30°C,
10 passing the solid fat based confectionery mass through a die of predetermined cross section to make at least one strand of product,
optionally, cutting the strand at the desired total length and,
receiving the at least one strand in a serving container or onto a food item.

15 19. Method according to claim 14 or 17, wherein it further comprises serving the at least one strand immediately after receiving.

20 20. Method according to any one of claims 16 to 18, wherein
the solid fat based confectionery mass is provided in a metered amount and is deposited in a barrel of the extruder, then, pressure is exerted in the extruder by
action of a piston or a screw pushing the mass in the barrel through the die.

25 21. Method according to claim 16, wherein
the at least one strand of extrudate is received on a sliding ramp that gently directs the at least one elongated strand of extrudate to the serving area.

22. Method according to claim 17, wherein
the die comprises an outlet of circular cross section of less than 3.5 mm to form a rod of extrudate.

30 23. Method according to claim 17, wherein
the die comprises an outlet of slot shape of height less than 1.2 mm and width more than 5.0 mm to produce a ribbon of extrudate.

35 24. Method according to claim 22, wherein
the die comprises an outlet of slot shape of height less than 1.0 mm and width more than 6.0 mm to produce a ribbon of extrudate.

25. Method according to claim 17, wherein

the die comprises multiple outlets of individual cross-sections, the outlets being separated from at least 1 mm from each other to extrude discrete strands of extrudate.

5

26. Apparatus for on demand dispensing of a decorating, easy-to-handle fat based confectionery product of any one of claims 1 to 12, comprising:

barrel means for receiving a predetermined amount of fat based confectionery material,

10 a pressure engaging means for engaging under pressure the fat based confectionery material contained in the barrel means,

characterized in that

15 it further comprises die means arranged for producing at least one elongated strand of the fat based confectionery product to an area-to-mass ratio that is higher than 8.0 cm² per gram unit, and

control means for actuating the pressure engaging means with the barrel means upon the push of a button and for extruding the at least one strand of the fat based confectionery.

Abstract:

A visually attractive, freshly prepared, fat based confectionery product formed of at least one elongated strand of extrudate of fat based confectionery material; the at least one strand being capable of being handled while exhibiting a temporary flexibility and the at least one strand being formed to a surface area-to-mass ratio that is higher than 8.0 cm² per gram unit with the at least one strand having a continuous total length that is more than 30 mm. The product can be produced freshly on demand by cold extrusion at food service outlets and can be associated with food or beverages. The product exhibits enhanced melting properties, high volume occupancy and play value.

FIGURE 4

2/5

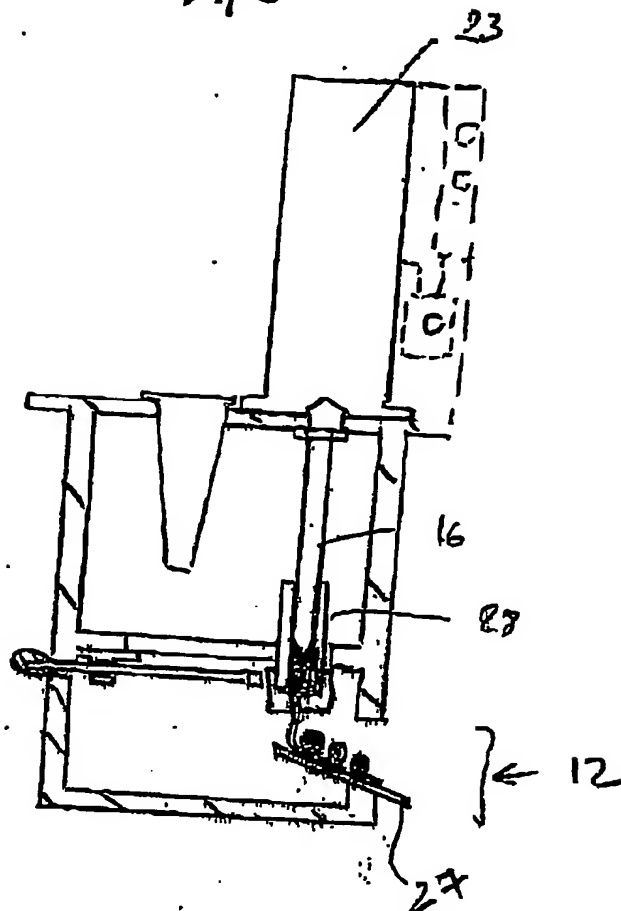


FIG. 3

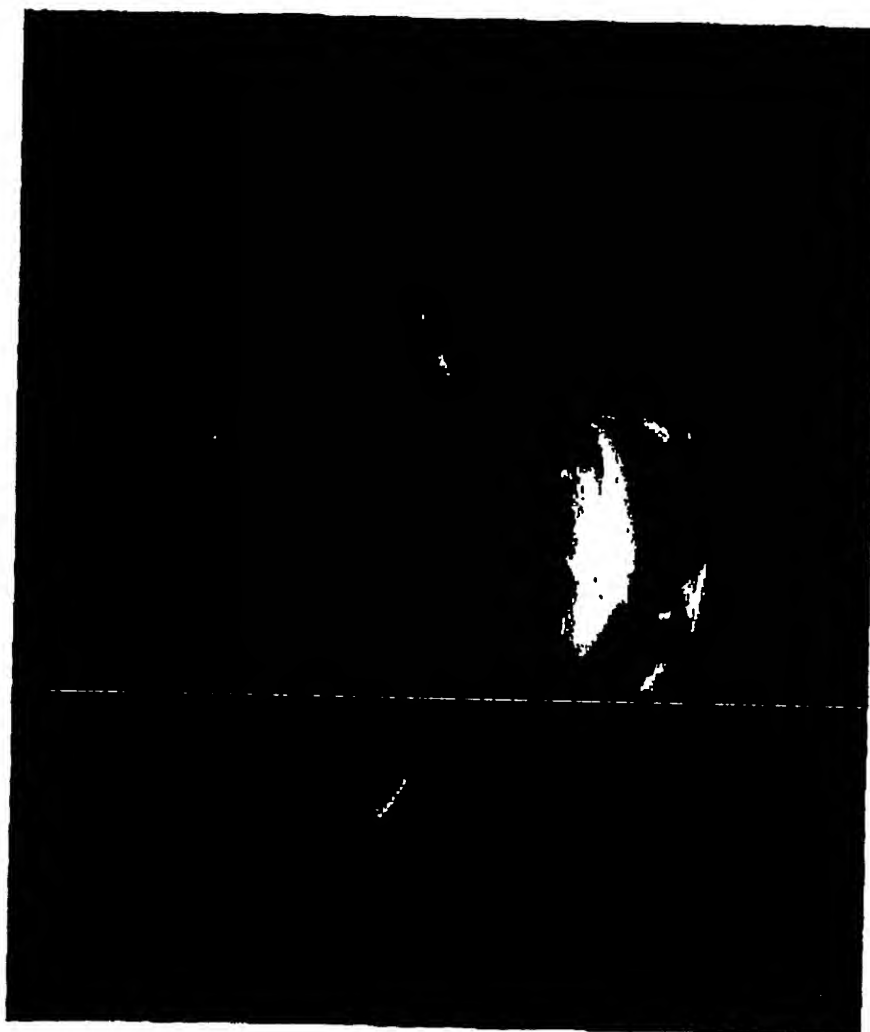
$$\frac{3}{5}$$


Fig. 4

4/5



Fig. 5

5/5

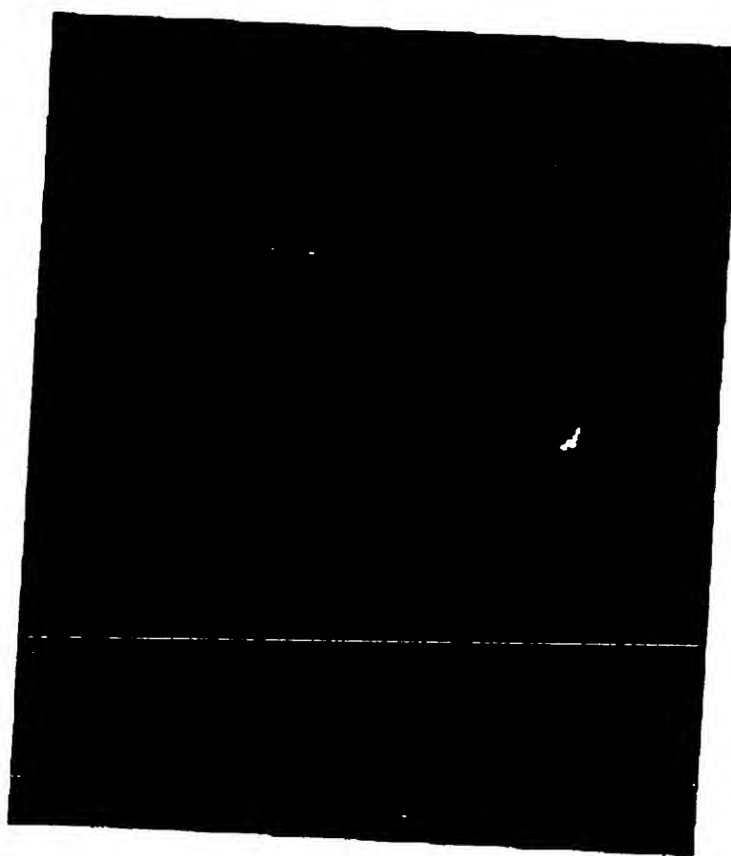


FIG. 6

This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**